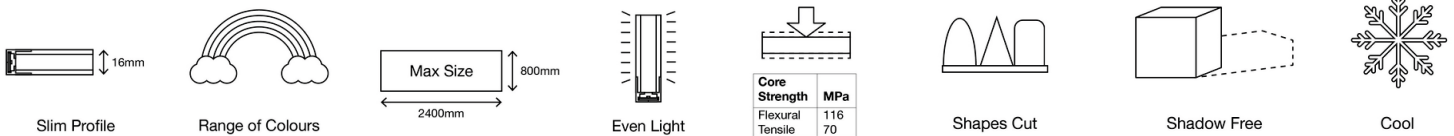# PIXALUX® Made in Austria

The robust Pixalux® light panel provides shadow-free light in structural applications.

Slim Profile	Range of Colours	Max Size	Even Light	Core Strength	Shapes Cut	Shadow Free	Cool
16mm		2400mm × 800mm		Flexural 116 / Tensile 70 MPa			

Being LED edge lit the Pixalux® panels can be supplied with fixed colour temperature , adjustable colour temperature, or full colour illumination.

Standard panel width is 16mm, the maximum panel sizes are 1200mm by 2000mm. The Pixalux® panels can release light from one or both sides, and the surfaces are cool.

Pixalux® light panels are ideal for illuminating cosmetics, perfumes, heat sensitive foods and other products. It can also be cut into shapes for special effect displays.

Shelving

Illuminating above and below in shelving applications, Pixalux® light panels create photo studio lighting for your product. Our standard black, aluminium, or glowing edges suit most joinery application.

Flooring

An acrylic composite, the Pixalux® light panel can be installed as flooring in high foot-traffic areas. Applications include lighting exhibits from below and floor wayfinding, or coloured LEDs for a dance floor.

Exhibition Design

With adjustable brightness and colour available, the Pixalux® light panel can provide the right atmosphere while drawing attention to important details of an exhibition.

Signage

Pixalux® light panels can be used to back-light graphic signs. A direct print to the panel makes for a stunning feature, or a removable vinyl sticker allows panels to be re-purposed every season.