

POWER SUPPLY PS-24-04-095




- 24 V LED power supply
- For all ALA lamps
- 85 W permanent load
- Lifetime > 3 years
- Over current protection
- Short circuit protection
- Over temperature protection





Output voltage	24 VDC
permanent load	85 W
ripple noise	200 mVp-p
voltage adj. range	24 only
load regulation	± 1%
input voltage range	180-295 VAC
input frequency range	47 ... 63 Hz
efficiency	89 % typ.
degree of protection	IP65
input connector	three-pin EURO earthed plug, CEE 7/7 (Type F)
output connector	1-PS plug, type T5 female
over current and short circuit protection	recovers automatically after fault condition is removed
overheating protection	shut down voltage, recovers automatically
environment	from -40°C to +39°C
MTBF	313.66Khrs min. MIL-HDBK-217F (25°C)
weight	1 kg



POWER SUPPLY PS-24-01-095

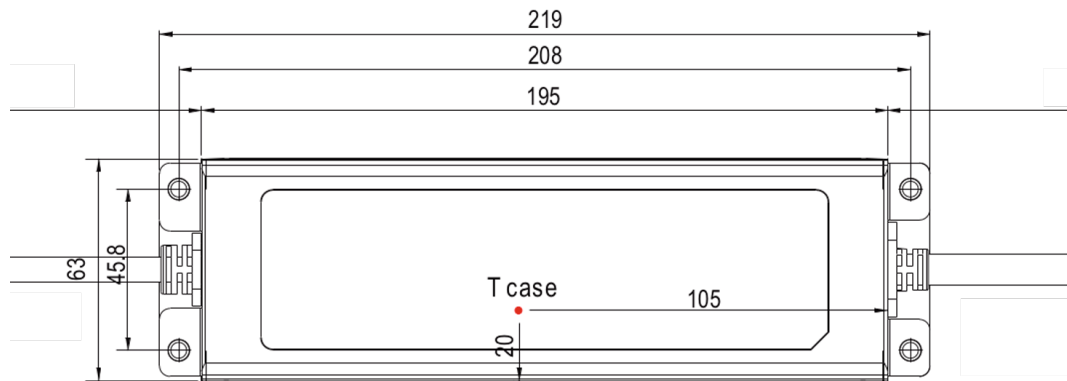

※ T case: Max. 45°C

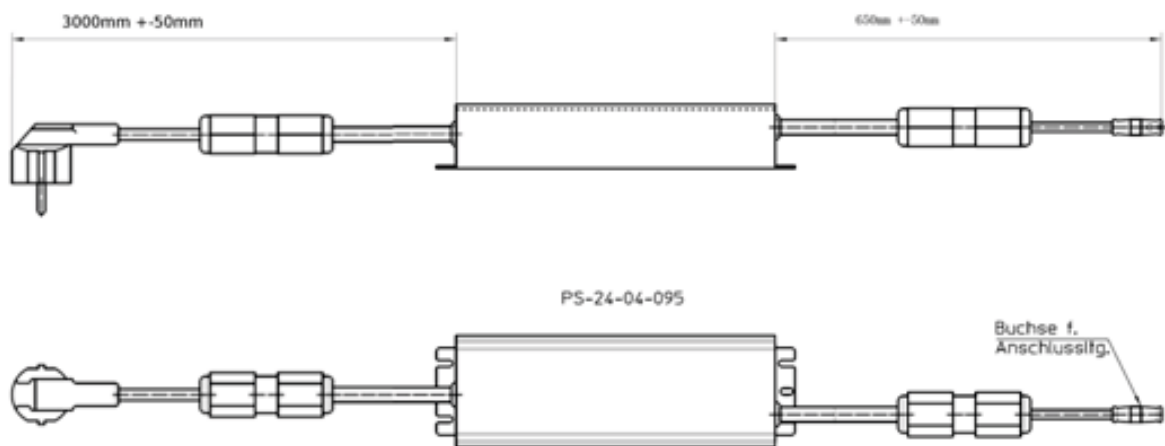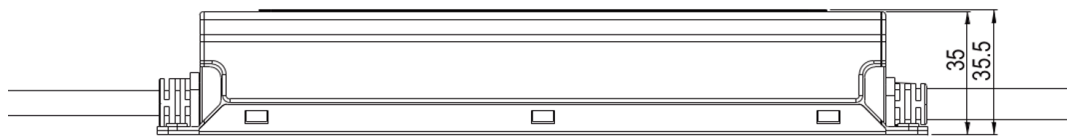

Art. 7142158 (M80713)