

POWER SUPPLY PS-24-10-240





- 24V LED power supply
- For all ALA lamps
- 190 W permanent load
- Lifetime > 7 years
- Over current protection
- Short circuit protection
- Over temperature protection



Output voltage	24 VDC
permanent load	190 W, 2 outputs, 95 W each
ripple noise	150 mVp-p
voltage adj. range	22,4 V - 25,6 V
load regulation	± 0,5 %
input voltage range	90 ... 305 VAC
input frequency range	47 ... 63 Hz
efficiency	92 % typ.
degree of protection	IP65
input connector	three-pin earthed plug, CEE 7/7 (Type F)
output connector	2-PS plugs type T5 female
over current and short circuit protection	recovers automatically after fault condition is removed
over temperature protection	shut down voltage, recovers automatically
ambient temperature	from -40°C to +39°C
MTBF	176,4 k hrs min. MIL-HDBK-217F (25°C)
weight	1,5 kg

POWER SUPPLY PS-24-10-240

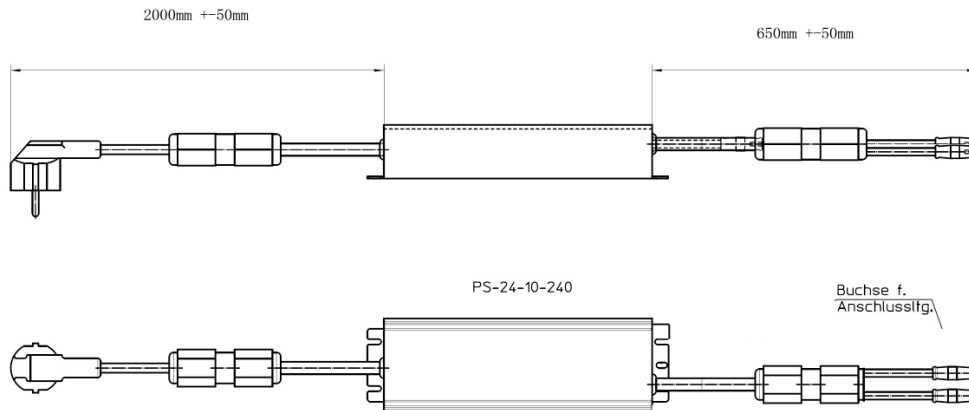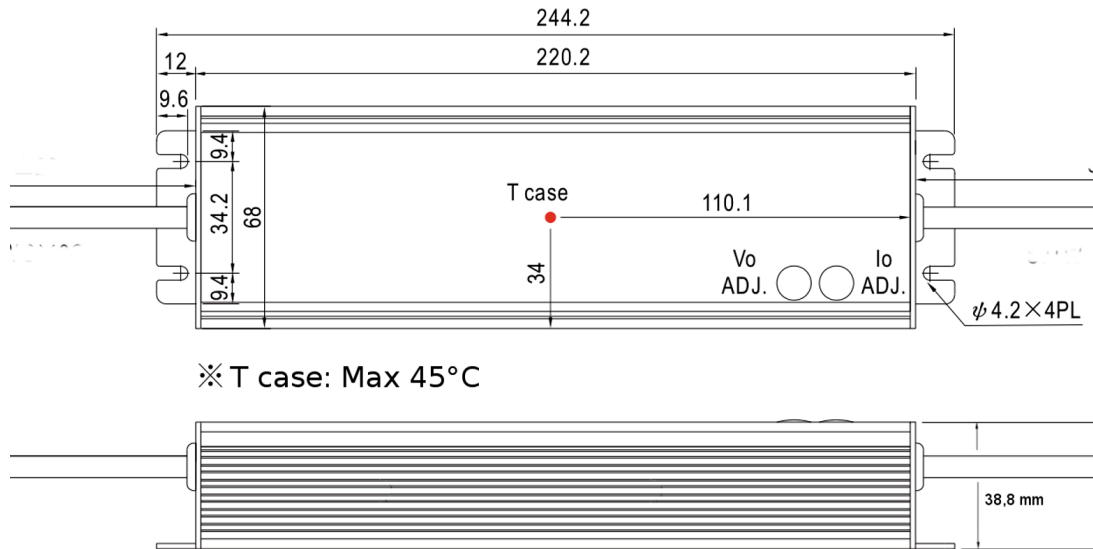

2 outputs „T5 female”
95W per output is the
maximal permanent load

Art. 7138886 (M79854)